

Leasing Program



mydepur
One Kitchen Supplies Solution

SkyLine Premium^s

Touch panel

Boiler



Touch panel

Super-intuitive, simple-to-learn and -use and customizable touch screen interface designed to make life easy. Color-blind friendly. Available in over 30 different languages.



101 humidity settings

Add variety to your cooking with 101 humidity settings from 0% to 100% boiler-generated steam, with automatic exhaust valve opening for extra crispy food.



OnE connectivity ready

SkyLine Premium^s connectivity gives real time access to your appliance from any smart device.



Green Version

Triple-glass door reduces energy consumption thanks to higher insulation.



Program mode

Save, organize into categories, and share up to **1.000 recipes** via USB or OnE connectivity.



OptiFlow

Perfect, even cooking results thanks to revolutionary high-tech **OptiFlow** air distribution system which guarantees uniform heat distribution.



6-sensor probe as standard

Precise measurement of the exact core temperature of your food.



Lambda sensor as standard

Precise real-time measurement and control over the humidity in the Oven chamber.



An extra effortless benefit

Stress-free efficiency and productivity with **SkyDuo**. Anticipating your needs with the self-intuitive connection between SkyLine Premium^s Ovens and SkyLine Chill^s and viceversa. The appliances guide you through the Cook&Chill process.



Advanced features

Simplify your life and make your workflow leaner by personalizing your **SkyHub homepage** with your favorite functions. Use **MyPlanner** to plan your daily work and receive personalized alerts for your tasks. **Plan-n-Save** organizes your loads in the most time- and energy-efficient way possible.




for Plan-n-Save



SkyClean

Cut your cleaning costs up to 15%. Flawless cleaning results, **green functions** and **automatic boiler descaling**. Flexible choice of 3 different chemicals to serve you better: **solid, liquid or 96% biodegradable enzymatic**.



SkyLine Pro^s

Touch panel

Steam injection



Touch panel

Super-intuitive, simple-to-learn and -use touch screen interface designed to make life easy. Adapted for color blindness. Available in over 30 different languages.



11 humidity levels

Add variety to your cooking with **11 humidity levels** and high efficiency instant steam with automatic exhaust valve opening for extra crispy food.



OnE connectivity ready

SkyLine Pro^s connectivity gives real time access to your appliance from any smart device.



Program mode

Save, organize into categories, and share up to **1.000 recipes** via USB or OnE connectivity.



OptiFlow

Perfect, even cooking results thanks to revolutionary high-tech **OptiFlow** air distribution system which guarantees uniform heat distribution.



Food core temperature control probe

Exact temperature reading with single sensor probe and for extra precision choose the optional **6-sensor probe**.



Lambda sensor (optional)

Precise real-time measurement and control over humidity in the Oven chamber for every type of food and size of load.




Advanced features

Simplify your life and make your workflow leaner by personalizing your **SkyHub homepage** with your favorite functions. Use **MyPlanner** to plan your daily work and receive personalized alerts for your tasks.



SkyClean

Flawless cleaning results, **green functions**. Flexible choice of 3 different chemicals to serve you better: **solid, liquid or 96% biodegradable enzymatic**.

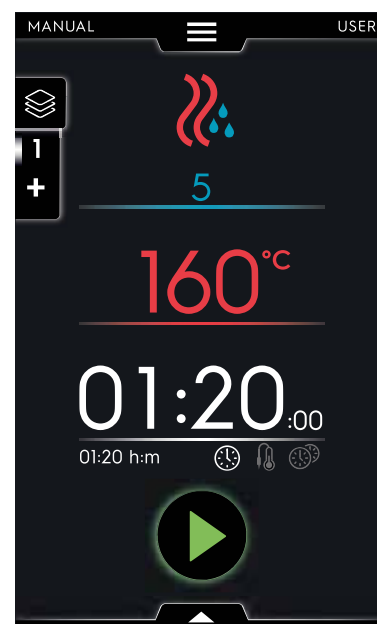

SkyLine Pro

Digital panel

Steam injection



Digital panel

Digital panel with unique light-guided selection simplifies every task.

11 humidity levels

Add variety to your cooking with **11 humidity levels** and high efficiency instant steam with automatic exhaust valve opening for extra crispy food.

OnE connectivity ready

SkyLine Pro connectivity gives real time access to your appliance from any smart device.



Program mode

Save and share your programs via USB or OnE connectivity. 100 free programs and 4 cooking phases.



OptiFlow

Perfect, even cooking results thanks to revolutionary high-tech **OptiFlow** air distribution system which guarantees uniform heat distribution.



Food core temperature control probe

Exact temperature reading with single sensor probe and for extra precision choose the optional **6-sensor probe**.




Lambda sensor (optional)

Precise real-time measurement and control over humidity in the Oven chamber for every type of food and size of load.



SkyClean

Flawless cleaning results. Flexible choice of 3 different chemicals to serve you better: **solid, liquid or 96% biodegradable enzymatic**.

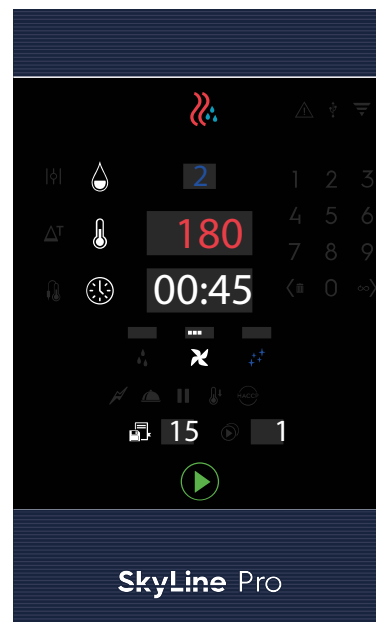

SkyLine Family

Choose the perfect partner to start expanding your cooking horizons.



6GN 1/1

External dimensions (wxdxh)
867x775x808 mm
Electrical power - 11 kW
Gas Power - 19kW



6GN 2/1

External dimensions (wxdxh)
1090x971x808 mm
Electrical power - 21.4 kW
Gas Power - 32 kW



10GN 1/1

External dimensions (wxdxh)
867x775x1058 mm
Electrical power - 19 kW
Gas Power - 21kW



10GN 2/1

External dimensions (wxdxh)
1090x971x1058 mm
Electrical power - 37.4 kW
Gas Power - 47 kW



20GN 1/1

External dimensions (wxdxh)
911x865x1794 mm
Electrical power - 37.7kW
Gas Power - 54kW



20GN 2/1

External dimensions (wxdxh)
1162x1067x1794mm
Electrical power - 65.4kW
Gas Power - 100kW

Dishwasher



Glass Washer

External Dimension (wxdxh): 456x495x700mm

Electrical Power: 2.7kW 230V 1PH



Undercounter dishwasher

External Dimension (wxdxh): 600x610x820mm

Electrical Power: 3.65kW 230V 1PH



Zanussi Door Lift Dishwasher

External Dimension (wxdxh): 750x840x1520mm

Electrical Power: 12.9kW 380-400V 3PH

Main Features

- Easy service access to main components without moving the unit.
- Built-in pressure boiler designed to raise incoming water to a guaranteed minimum temperature of 82° C for sanitizing rinse. No external boiler is required.
- Washing system endowed with rotating washing arms, high powered wash pump and large capacity wash tank for professional washing.
- Maximum capacity of 30 racks per hour.
- 120 seconds cycle.
- Simple operation control panel.
- Solid double skinned counter-balance stainless steel door with hurt-free handle in plastic.
- Equipped with single phase electrical cable and Schuko plug for easy and fast installation.

Main Features

- Built-in pressure boiler sized to raise incoming 50 ° C water to guarantee a minimum rinsing temperature of 82°C for sanitizing rinse. No external booster is required.
- Incorporated Soft Start feature to offer additional protection to more delicate items.
- 4second(variable)pause after washing and before rinsing ensures that no drops of unclean water will fall on the clean items at the end of the rinsing cycle.
- Fully automatic self-cleaning cycle avoids the risk of bacteria proliferation.
- 120/180 seconds cycle.
- Simple control panel with digital display allows on- site personalization of washing and rinsing cycle times and temperatures as well as precise rinse aid and detergent quantities to suit customer's needs.
- Easy to remove wash/rinse arms for cleaning.

Main Features

- ACTIVE model with Guaranteed Rinse System. Atmospheric boiler in ACTIVE model combine with rinse booster pump offer a perfect rinsing performance in term of constant pressure and high temperature of the water, always at 84°C during the rinse cycle regardless of the inlet water temperature (from 10°C to 60°C) and water pressure of the network (a minimum of 0.5bar or 7psi).
- The green eye of Guaranteed Rinse System (GRS) provides the operator with an immediate signal after every rinse cycle informing that rinsing has been performed to perfection.
- 4 second (variable) pause after washing and before rinsing ensures that no drops of unclean water will fall on the clean items at the end of the rinsing cycle.
- Thermal label compliant approved and compliant with NSF sanitization standards (paragraph 7.1).
- Incorporated Soft Start feature to offer additional protection to more delicate items.
- An effective rinse system uses only 3 litres of clean hot water per basket for lower running costs.
- Fully automatic self-cleaning cycle avoids the risk of bacteria proliferation.

Dishwasher



Electrolux Door Lift dishwasher

External Dimension (wxdxh): 870x720x1630mm

Electrical Power: 9.9kW 400V 3PH

Main Features

- Requires only 2 liters of water per washing cycle thus ensuring low energy, water, detergent and rinse aid consumption.
- Built-in atmospheric boiler sized to raise incoming cold water to a minimum of 84 °C for sanitizing rinse. No external boiler is required. Constant temperature of 84°C throughout the rinsing cycle regardless of the network's water pressure.
- Incorporated Soft Start feature to offer additional protection to more delicate items.
- Automatic self-cleaning cycle and self-draining vertical wash pump and boiler to avoid bacteria proliferation.
- State-of-the-art electronic controls with built-in programming, self-diagnostics for serviceability and automatic interior self-cleaning cycle.
- Maximum capacity per hour of 80 racks or 1.440 dishes (High productivity mode) easy to switch to 63 racks or 1.134 dishes (NSF/ANSI 3 mode) by pressing a button.
- 45/84/150 seconds cycles (High productivity mode); 57/84/150 seconds cycles (NSF/ANSI 3 mode).



Convenyor Dishwasher

External Dimension (wxdxh): 1148x800x1846mm

Electrical Power:

- a. With Thermal Label Compliant 71c Power requirement is 50.5kW 380-400V 3PH
- b. Without Thermal Label Compliant 71c Power requirement is 46kW 380-400V 3PH

Main Features

- Adjustable feet for full access underneath the machine for cleaning.
- Easy-to-use control panel.
- Auto-start/stop equipped in different zones ensures that the zone runs only when a rack is passing through it. This reduces water, energy, chemical consumption and noise.
- All internal components: wash and rinse arms, tank filters, curtains can be easily removed for cleaning.
- Maximum capacity per hour of 200 racks.
- Single rinse with stabilized pressure valve guarantees rinse water consumption of 1.5 liters/ rack regardless of inlet water pressure to ensure low energy, water, detergent and rinse aid consumption.
- Built-in stabilized pressure valve ensures constant pressure throughout the rinsing cycle regardless of inlet water pressure.
- Easy service from front and top.
- Double skin insulated door reduces noise and heat loss.

Mydapur provides a total dishwasher cleaning solution.

Add-on availables are:-

- Stainless steel table can be custom made to site requirement.
- Grease trap available upon request.
- Pre-rinse available upon request.
- Dishwash rack storage solution available upon request.
- Monthly chemical supply can be added.

SkyLine Chill^S Family

As time is an invaluable asset for any business, **SkyLine Chill^S** has a range of time-saving features to increase the productivity of your kitchen and improve your workflow.



Touch panel

Super-intuitive, simple-to-learn and -use and customizable touch screen interface designed to make life easy. Color-blind friendly. Available in over 30 different languages.



OnE connectivity ready

SkyLine Chill^S connectivity gives real time access to your appliance from any smart device.



Automatic mode

Simple and fast to use automatic cycles with 10 families and 9 new **special chilling Cycles⁺**.

Low on space? **SkyLine Chill^S** offers 4 special **LiteHot cycles** too: Chocolate, Proving and Retarded Proving and Fast Thawing.



Program mode

Save, organize into categories, and share up to **1000 recipes** via USB or OnE connectivity.



OptiFlow

Flexible, even results whether chilling and freezing thanks to revolutionary high technology design **OptiFlow** air distribution system which guarantees perfect evenness.



6-sensor probe as optional

Extra precise measurement of the exact core temperature of your food. 3-sensor probe as standard.



for 6-sensor probe



ARTE 2.0

Keep their business safe. ARTE 2.0 estimates time remaining on probe-driven cycles based on artificial intelligence technology.



Turbo Cooling

Non-stop chilling for busy kitchens and patisseries. Simply set a working temperature between +10° and -41° C and **SkyLine Chill^S** maintains the set temperature over time.



Advanced features

Simplify your life and make your workflow leaner by personalizing your **SkyHub homepage** with your favorite functions. Use **MyPlanner** to plan your daily work and receive personalized alerts for your tasks.



for MyPlanner



An extra effortless benefit

Stress-free efficiency and productivity with **SkyDuo**. Anticipating your needs with the self-intuitive connection between **SkyLine Premium^S** Ovens and **SkyLine Chill^S** and viceversa. The appliances guide you through the **Cook&Chill** process.

OptiFlow

Sky Hub

Turbo Cooling

Sky Duo

Human-Centered Design

Green Spirit



SkyLine Chill^S Family

Cold, freeze or LiteHot? In the same footprint you can perform 3 different functions. Choose the perfect Skyline Chile^S size for your kitchen



30/30kg - 6GN 1/1

External dimensions (wxdxh)

897x937x1060 mm

Electrical power - 2.7 kW

Built-in refrigeration unit



50/50kg - 10GN 1/1

External dimensions (wxdxh)

895x939x1731 mm

Electrical power - 4.5 kW

Built-in refrigeration unit



100/70kg - 10GN 121

External dimensions (wxdxh)

1250x1092x1730 mm

Electrical power - 5.5 kW

Built-in refrigeration unit



100/85kg - 20GN 1/1

External dimensions (wxdxh)

1040x850x1741 mm

Electrical power - 0.88 kW

Remote refrigeration unit



150/120kg - 20GN 2/1

Electrical power - 2.25kW

200/170kg - 20GN 2/1

Electrical power - 2.25kW

External dimensions (wxdxh)

1400x1266x2470 mm

Remote refrigeration unit



200/170kg - 2 x 10GN 1/1

External dimensions (wxdxh)

1800x1266x2400 mm

Electrical power - 3.28 kW

Remote refrigeration unit



MyDapur PLT

(LLP No: LLP0000041-LGN)

89A, Jalan BP 7/2,
Bandar Bukit Puchong,
47120 Puchong, Selangor



1300-88-8633



support@mydapur.com.my



www.mydapur.com.my



Mydapur PLT